


LEDinspect UTILITY1000

Inspectionlights

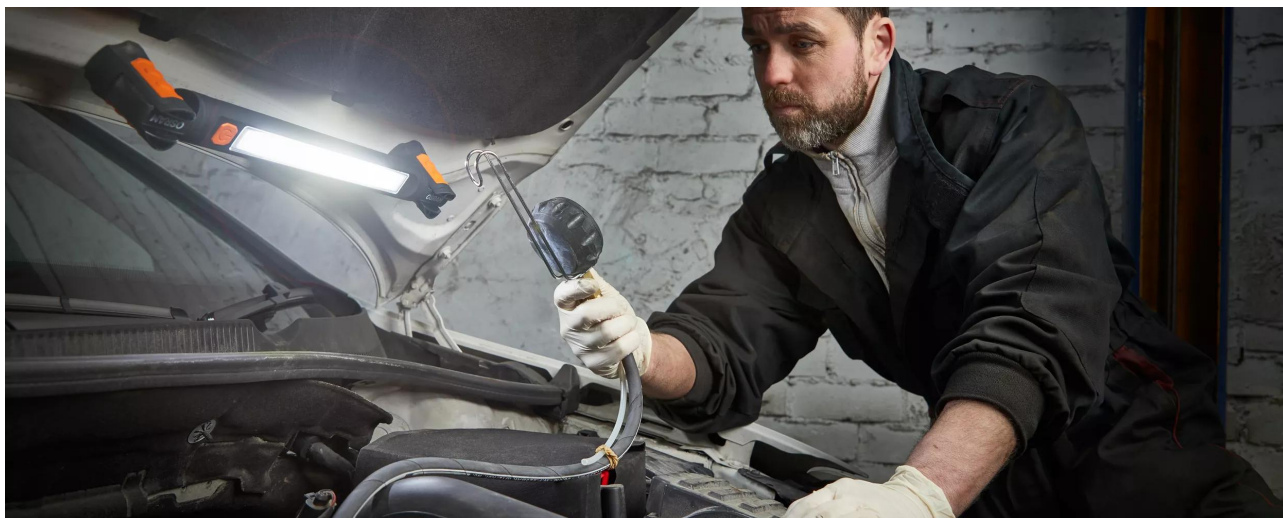

Multi-Functional Lamp

High flexibility and diverse adjustment possibilities. Up to 180° ratcheting bases and up to 360° rotating body.




1000 lm

2 light functions: Up to 1000lm-high Up to 400lm-low For individually adjustable light settings



Magnetic Base & Rotatable Hook

Versatile mounting options



2-year-OSRAM guarantee*

Systematic quality assurance measures underpin the premium workmanship and functionality of our products. Innovative technology and excellent quality really pay dividends for our customers.

Light is versatile

Designed with versatility in mind, the UTILITY 1000 combines magnetic, 180° ratcheting base with a 360° rotating body. This means the inspectionlight can be used either freestanding or hands-free, positioned in any number of ways to ensure the work area is properly illuminated. With two light functions - high with up to 1000lm and low with up to 400lm - it produces a light output that can be matched to the task at hand.

This inspection light is ideal as a light for manual work, car repairs and everyday use. OSRAM also provides a 2-year guarantee on this product* Charging cable and mains

Product datasheet



charger included.

Product datasheet

Technical data

Product information

| | |
|---|-----------------------|
| Application (Category and Product specific) | LED inspection lights |
|---|-----------------------|

General Product Information

| | |
|------------------------|----------|
| Global order reference | LEDIL407 |
|------------------------|----------|

Electrical Data

| | |
|-----------------|-------|
| Nominal wattage | 19 W |
| Nominal voltage | 7.4 V |

Photometric Data

| | |
|-----------------------|---------|
| Color temperature | 6500 K |
| Nominal luminous flux | 1000 lm |
| Light color LED | White |

Physical Attributes & Dimensions



| | |
|----------------|----------|
| Product weight | 490.00 g |
| Length | 500.0 mm |
| Width | 41.0 mm |
| Height | 48.0 mm |

LED module information

| | |
|---------------------------|---|
| Number of LEDs per module | 1 |
|---------------------------|---|

Colors & materials

| | |
|------------|----------------|
| Base color | Black / Orange |
|------------|----------------|

Lifetime Data

| | |
|-----------|---------|
| Guarantee | 2 years |
|-----------|---------|

Additional product data

| | |
|------------------------------|----------------------------------|
| Type of Battery | Rechargeable |
| Number of included batteries | 1 |
| Scope of battery | Yes |
| Battery | High-quality lithium-ion battery |

Capabilities

| | |
|------------|-----|
| Technology | LED |
|------------|-----|

Certificates & standards

| | |
|-----------|------------------------|
| Standards | CE / EMC / MSDS / ROHS |
| IK Class | IK07 |

Logistical data

| | |
|-----------------------|------|
| Watt hour per battery | 9.62 |
|-----------------------|------|

Environmental & Regulatory Information



| | |
|---|--|
| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
| Candidate list substance 1 | Lead |
| CAS No. of substance 1 | 7439-92-1 |
| Safe use instruction | The identification of the Candidate List substance is sufficient to allow safe use of the article. |
| Declaration no. in SCIP database | 12140b2a-ec70-4b9c-9c15-9b33a359d5fe |

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|---------------------|---------------------------------|---|-----------------------|--------------|
| 4062172338356 | INSPECTION LAMP | Folding carton box 1 | 80 mm x 57 mm x 510 mm | 2.33 dm ³ | 583.00 g |
| 4062172338363 | INSPECTION LAMP | Shipping carton box 6 | 530 mm x 190 mm x 188 mm | 18.93 dm ³ | 3968.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

| File | |
|---|--|
|  | User instruction LEDinspect UTILITY 1000 LEDIL407 |
|  | User instruction GPRS_Safety symbols instructions |

Legal advice

Application advice:

For more detailed application information and graphics please see product datasheet and user instruction.*for precise conditions please refer to:

www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

